

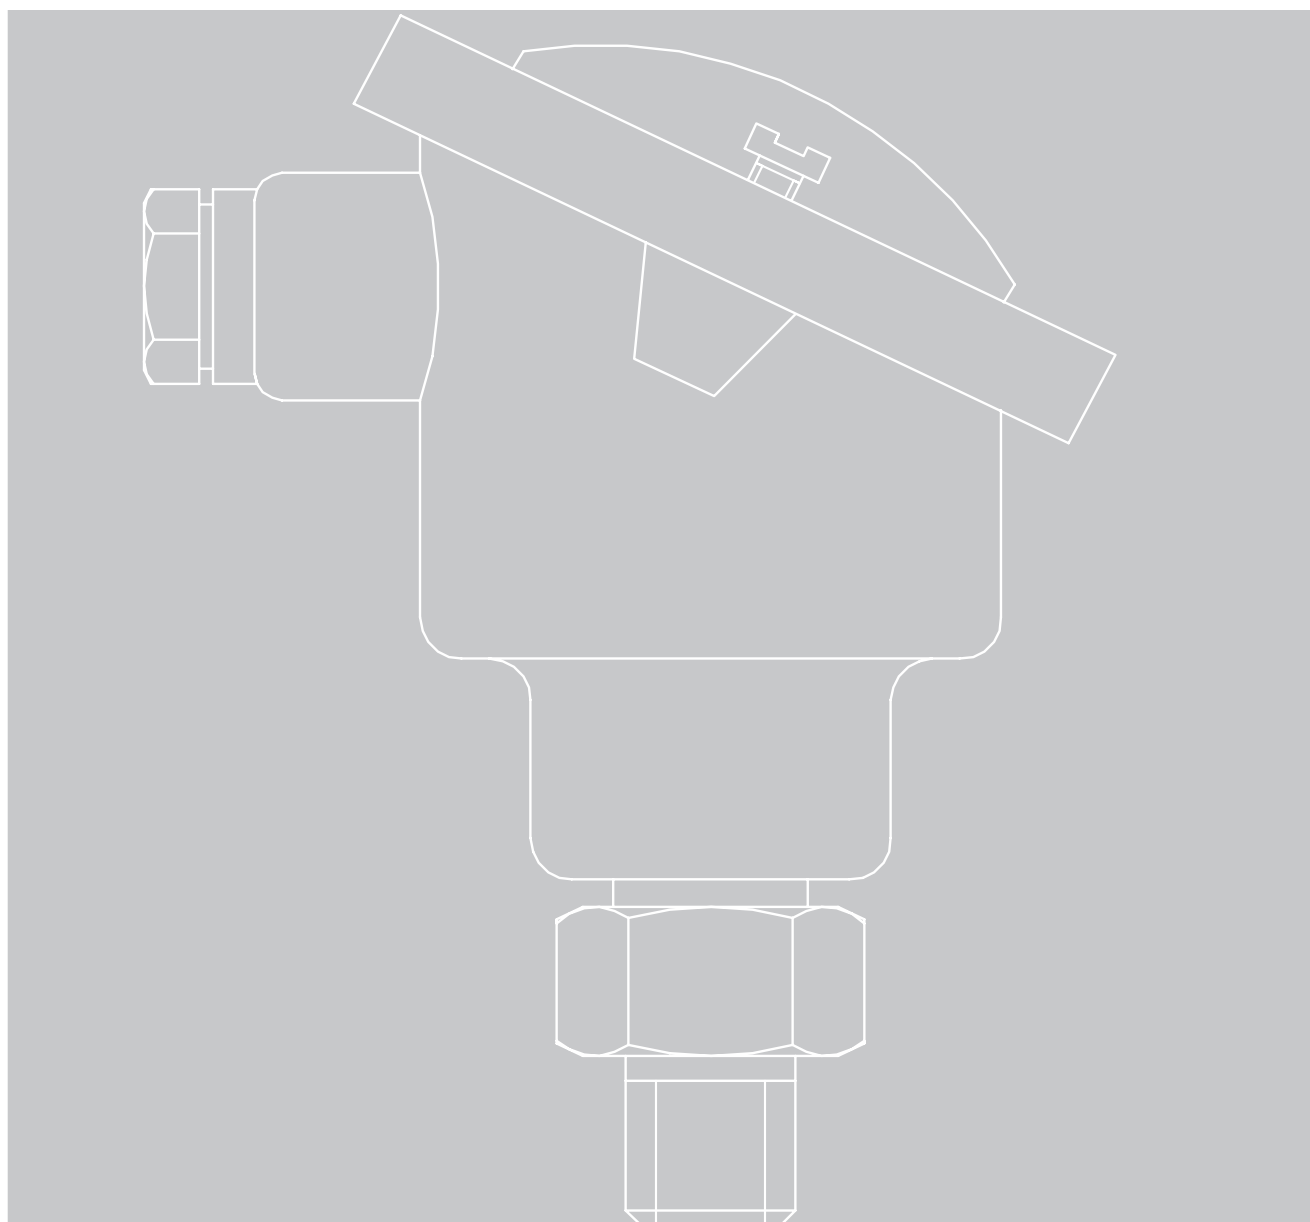
INFORMATION SHEET

T 5200 EN

Temperature Sensors and Thermostats






CE EAC



Outdoor sensors

Measurement of outdoor temperature mounted on the exterior walls of buildings

Type	5225 ¹⁾	5226 ¹⁾	5227-4
Resistor	Pt 100	Pt 100	Pt 1000
Qty.	1	2	1
Permissible temperature range in °C			
Medium	-20 to +50	-20 to +50	
Ambient	-35 to +85	-35 to +85	-50 to +90
Style			
Data sheet	▶ T 5203	▶ T 5203	▶ T 5220




¹⁾ Without EAC certificate



Fig. 1: Type 5257-51 Room Panel

Duct sensors





Measurement of supply air, mixed air or exhaust air temperatures in ventilation and air-conditioning systems (non-corrosive air or gases)

Type	5215 ¹⁾	5216 ¹⁾	5217
Resistor	Pt 100	Pt 100	Pt 1000
Qty.	1	2	1
Sensor length in mm	60 to 300	60 to 300	60 to 280
Sensor shaft consisting of	Nickel-plated brass	Nickel-plated brass	Nickel-plated brass
Permissible temperature range in °C			
Medium	-35 to +200	-35 to +200	-20 to +150
Ambient	-20 to +70	-20 to +70	-20 to +70
Style			
Data sheet	▶ T 5203	▶ T 5203	▶ T 5220

¹⁾ Without EAC certificate

Room sensors and room panels

Measurement of room temperature in recreation rooms and offices


Type	5255 ¹⁾	5257-11 ²⁾	5257-51 ²⁾	5257-71 ²⁾
Resistor	Pt 100	Pt 1000	Pt 1000	Pt 1000
Qty.	1	1	1	1
Permissible temperature range in °C	-35 to +85	-35 to +70	-35 to +70	-35 to +70
Equipped with				
Set point correction and mode switch			•	•
Style				
Data sheet	▶ T 5203	▶ T 5220	▶ T 5220	▶ T 5220

¹⁾ Without EAC certificate

²⁾ See associated Data Sheet ▶ T 5220 for possible connections to SAMSON controllers

Contact sensors


Measurement of water temperature in heating supply pipes and return pipes

Type	5267-3
Resistor	Pt 1000
Qty.	1
Permissible temperature range in °C	-50 to +120
Style	
Data sheet	▶ T 5220

Immersion sensors with thermowell

Measurement of water temperature in heating supply pipes and return pipes, in hot water heaters and thermal plants.

Thermowell required.

Type	5277-21	5277-31	5277-51
Resistor	Pt 1000		
Qty.	1		
Length [mm]			
Sensor	50		
Connecting cable	2000	3000	5000
Sensor shaft Consisting of	Brass, CrNiMo steel		
Pressure rating	PN 16 and 40		
Permissible temperature range in °C	-50 to +180		
Style			
Data sheet	▶ T 5220		

Fast-response temperature sensors

Fast-responding temperature sensors to measure rapid temperature changes in heat exchangers

Type	5207-0060	5207-61	5207-64	5207-65
Resistor	Pt 1000	Pt 1000	Pt 1000	Pt 1000
Qty.	1	1	1	1
Length [mm]				
Immersion tube	-	110	170	250
Immersion depth	52	80	40 to 100	120 to 190
Connecting cable	2000	2500	2500	2500
Pressure rating	PN 16	PN 40	PN 40	PN 40
Permissible temperature range in °C				
Medium	-5 to +90	-50 to +180	-15 to +180	-15 to +180
Ambient	-5 to +80	-50 to +180	-15 to +180	-15 to +180
Data Sheet	▶ T 5222	▶ T 5221	▶ T 5221	▶ T 5221



Fig. 2: Type 5267-3 Contact Sensor







Fig. 3: Type 5277-x1 Immersion Sensor with short and long thermowells



Fig. 4: Type 5207-0060 Fast-response Temperature Sensor

Screw-in sensors

Measurement of water temperature in heating supply pipes and return pipes, in hot water heaters and thermal plants

Type	5204-21 5204-26 5204-27	5205-46 ¹⁾ 5205-47 ¹⁾ 5205-48 ¹⁾	5206-46 5206-47 5206-48	5207-21 5207-26 5207-27	5207-46 5207-47 5207-48
Resistor	Pt 100	Pt 100	Pt 100	Pt 1000	Pt 1000
Qty.	1	1	2	1	1
Sensor length					
80 mm	5204-21	–	–	5207-21	–
160 mm	5204-27	5205-47	5206-47	5207-27	5207-47
250 mm	5204-26	5205-46	5206-46	5207-26	5207-46
400 mm	–	5205-48	5206-48	–	5207-48
Sensor shaft consisting of	Brass ²⁾	1.4571	1.4571	Brass	1.4571
Pressure rating	PN 16	PN 40	PN 40	PN 16	PN 40
Permissible temperature range in °C					
Medium	-20to+150	-60to+400	-60to+400	-20to+150	-60to+400
Ambient	-20to+70	-20to+70	-20to+70	-20to+70	-20to+70
Style					
Data sheet	► T 5203	► T 5203	► T 5203	► T 5220	► T 5220

¹⁾ Without EAC certificate

²⁾ Type 5204-21 also available in 1.4571 and PN 40 (► T 5203)






Fig. 5: Types 5205 and 5206 Screw-in Sensors

Thermostats

Thermostats tested according to DIN EN 14597 for use as temperature monitors (TM), safety temperature monitors (STM), temperature regulators (TR) or safety temperature limiter (STL) as well as in combinations consisting of temperature regulator and safety temperature limiter (TR/STL) or temperature regulator and safety temperature monitors (TR/STM).



Single thermostats




Type	5343-1 to -4	5344-1 and -2	5345-1/-2
Function	STM	TR	STL
Set point range in °C	0 to 60, 40 to 100, 70 to 130 or -35 to +95	0 to 120 or 20 to 150	70 to 130, or 30 to 90
Sensor length in mm	2000 ^{2), 3)}		
Possible thermowell length in mm	100, 150, 200, 300 ²⁾		
Max. medium temperature in °C	85, 125, 155 or 120	145 or 175	155 or 115
Style			
Data sheet	▶ T 5206		

¹⁾ Without EAC certificate; not tested according to DIN EN 14597

²⁾ Thermowell not included in the scope of delivery. See Data Sheet ▶ T 5206 for description.

³⁾ Strap for mounting the contact thermostat not included in the scope of delivery. See Data Sheet ▶ T 5206 for description.

Double thermostats

Type	5347-1/-2	5348-1/-2	5349-1 ¹⁾
Function	TR/STL	TR/STM	STM/STL
Set point range in °C	TR: 0 to 120 STL: 70 to 130 or TR: 0 to 120 STL: 30 to 90	TR: 0 to 120 STM: 70 to 130 or TR: 0 to 120 STM: 40 to 100	STM: 70 to 130 STL: 70 to 130
Sensor length in mm	2000 ^{2), 3)}		
Possible thermowell length in mm	150, 300 ²⁾		
Max. medium temperature in °C	145 or 115	145 or 125	145
Style			
Data sheet	▶ T 5206		

¹⁾ Without EAC certificate

²⁾ Thermowell not included in the scope of delivery. See Data Sheet ▶ T 5206 for description.

³⁾ Strap for mounting the contact thermostat not included in the scope of delivery. See Data Sheet ▶ T 5206 for description.

i Note

Old SAMSON thermostats can be replaced by the new SAMSON thermostats as shown in the table on page 6.

Replacement of old SAMSON thermostats with the new SAMSON thermostats

i Note

An adapter (order no. 1400-9856) must be used to use old single thermostats with existing thermowells.
Existing thermowells of double thermostats must always be replaced (► T 5206).

Function	OLD				NEW		
	SAMSON type	Configura- tion ID	Measuring range	Thermowell	SAMSON type	Configura- tion ID	Measuring range
STM	5313-4	1008795	0 to 60 °C	150 x 8 mm, G ½	5343-1	2111650	0 to 60 °C
	5313-5	1008797	60 to 100 °C	150 x 8 mm, G ½	5343-2	2111654	40 to 100 °C
	5313-6	1008796	60 to 110 °C	150 x 8 mm, G ½	5343-3	2111655	70 to 130 °C
	5313-7	1008798	60 to 120 °C	150 x 8 mm, G ½			
	5313-8	1008799	60 to 130 °C	150 x 8 mm, G ½			
	5313-9	1008801	20 to 95 °C	300 x 8 mm, CrNiMo steel	5343-4	2382590	35 to 95 °C
	5313-10	1008800	50 to 300 °C	150 x 8 mm, G ½	1)		
TR	5314-1	1008802	20 to 90 °C	150 x 8 mm, G ½	5344-1	2111657	0 to 120 °C
	5314-2	1008803	20 to 90 °C	300 x 8 mm, G ½			
	5314-3	1008804	20 to 150 °C	100 x 8 mm, G ½	5344-2	2111659	20 to 150 °C
STL	5315-1	1008805	30 to 110 °C	150 x 8 mm, G ½	5345-1	2108361	70 to 130 °C
	5315-2	1008806	60 to 130 °C	150 x 8 mm, G ½			
	5315-3	1008807	130 to 200 °C	150 x 8 mm, G ½	1)		
					5345-2	2382592	30 to 90 °C
TR/STL	5317-2	1008810	30 to 110 °C	150 x 8 mm, G ½	5347-1	2108363	TR: 0 to 120 °C STL: 70 to 130 °C TR: 0 to 120 °C STL: 30 to 90 °C
	5317-3	1008809	20 to 90 °C	150 x 8 mm, G ½			
	5317-4	1008811	50 to 120 °C	150 x 8 mm, G ½	5347-2	2821326	
	5317-5	1008808	60 to 130 °C	150 x 8 mm, G ½			
TR/STM	5318-1	1008813	0 to 70 °C	300 x 8 mm, G ½	1)		
	5318-2	1008814	20 to 120 °C	150 x 8 mm, G ½	5348-1	2108365	TR: 0 to 120 °C STM: 70 to 130 °C TR: 0 to 120 °C STM: 40 to 100 °C
	5318-3	1008815	20 to 100 °C	150 x 8 mm, G ½			
	5318-4	1008812	20 to 110 °C	150 x 8 mm, G ½	5348-2	2821369	
STM/STL					5349-1	2347423	STM: 70 to 130 °C STL: 70 to 130 °C

1) No comparable thermostat in the current product range